



Husqvarna®



PRODUCT CATALOGUE 2021

FLOOR GRINDING SYSTEMS WITH OUTSTANDING PRODUCTION RATES

Preparing, grinding and polishing of concrete floors as well as repairing and polishing of terrazzo and other natural stone, are demanding jobs. Our mission is to enable you to perform at your maximum potential, by providing you with a system that includes the patented Dual Drive Technology™, the wireless remote control machines PG 830 RC and PG 690 RC and the efficient dust management range. Our product programme also includes our range of easily transportable and highly useful small PG models. Like all Husqvarna PG machines they are equipped as standard with our quick-fit Redi Lock® diamond tool system.

Range overview.

The range of Husqvarna floor grinders consists of eight models with grinding width from 280 mm to 800 mm and 2.2 kW to 15 kW power, weighing from 70 to 598 kg. You can always find a Husqvarna PG model optimal for your kind of operation.






REMOTE CONTROL The wireless remote controlled, self-propelled Husqvarna PG 830 RC and PG 690 RC enables significantly higher productivity and even better work result together with more ergonomic operation and transport.




HUSQVARNA HIPERFLOOR® A method for mechanical grinding, treatment and polishing of concrete floors. The result is a floor with spectacular reflective qualities as well as increased hardness and durability.

EASY TOOL CHANGE SYSTEM

For easy change of diamond tooling. No tools are needed when changing settings or making adjustments. Standard on all Husqvarna PG models.

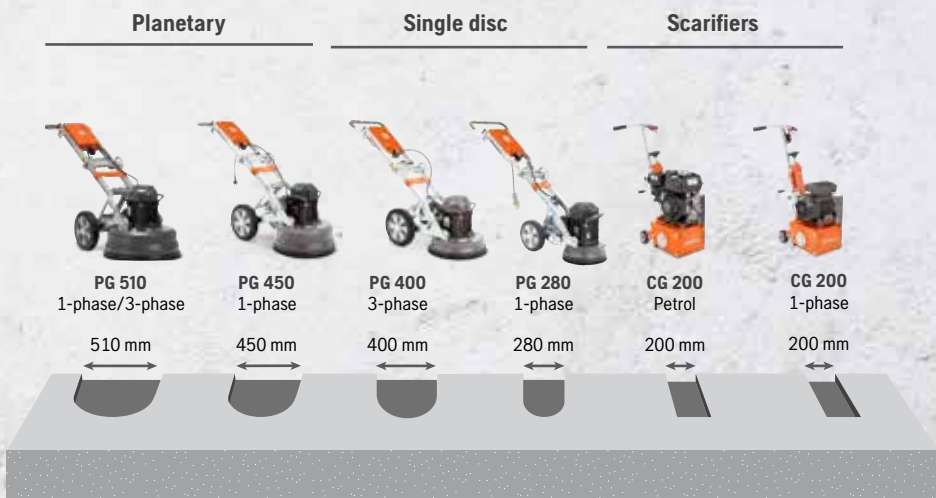

DUAL DRIVE TECHNOLOGY™ This patented technology increases production rates, enhances operator control and allows for a wider range of applications.

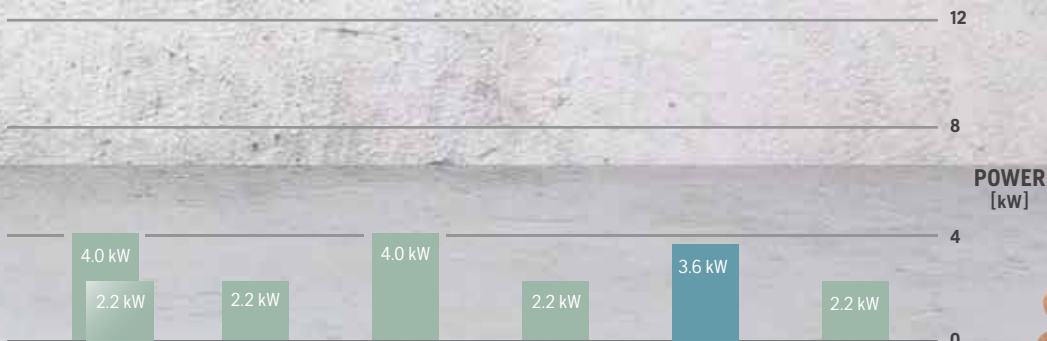

For more information, visit www.husqvarnacp.com



| GRINDERS | PG 830 RC | PG 830 | PG 830 S | PG 690 RC |
|-------------------------------------|--|--|--|--|
| TECHNICAL SPECIFICATIONS | | | | |
| | 3x 200V 50A 11 + 1.5 kW 3x 400V 30A 15 + 1.5 kW 3x 480V 30A 15+ 1.5 kW | 3x 200V 50A 11 + 1.5 kW 3x 400V 30A 15 + 1.5 kW 3x 480V 30A 15+ 1.5 kW | 3x200V 50A 11 kW 3x400V 30A 11 kW 3x480V 30A 11 kW | 3x200V 50A 11+1.5 kW 3x400V 30A 11+1.5 kW 3x480V 30A 11+1.5 kW |
| Power, kW | 12.5 - 16.5 | 12.5-16.5 | 11 | 12.5 |
| Voltage, V | 200-480 | 200-480 | 200-480 | 200-480 |
| Rated current, A | 30/30/50 | 30/30/50 | 30/30/50 | 30/30/50 |
| Power supply | 3-phase | 3-phase | 3-phase | 3-phase |
| Grinding width, mm | 800 | 800 | 800 | 630 |
| Grinding disc, mm | 3×270 | 3×270 | 3×270 | 3×270 |
| Grinding pressure total, kg | 302 | 288 | 238 | 242 |
| Grinding pressure with weights, kg | 259-362 | 245-348 | 195-298 | 198-307 |
| Grinding disc speed, rpm | 421-1403 | 421-1403 | 421-1403 | 441-1470 |
| Direction of rotation | Dual Drive | Dual Drive | Head: CW Disc: CCW | Dual Drive |
| Dimensions (L×W×H), mm | 1410×830×1155 | 1550×830×1145 | 1550×830×1145 | 1320×670×1155 |
| Weight, kg | 598 | 556 | 497 | 502 |
| Remote control | ● | - | - | ● |
| Battery power for transportation | ● | - | - | ● |
| Connectivity BLEM/Fleet puck option | ●/● | - / ● | - / ● | ●/● |
| USB charger | ● | ● | - | ● |
| RECOMMENDED EQUIPMENT | | | | |
| Recommended dust extractor 1/ 2 | T 10000 | T 10000 | T 10000 | T 7500 |
| Recommended pre-separator | C 5500 | C 5500 | C 5500 | C 5500 |
| ARTICLE INFORMATION | | | | |
| | 967 97 79-01, 380-415 V 967 97 79-03, 380-415 V | 967 97 78-01, 380-415 V 967 97 78-03, 380-415 V | 967 97 77-01, 380-415 V 967 97 77-03, 380-415 V | 967 97 76-01, 380-415 V 967 97 76-03, 380-415 V |



| GRINDERS | PG 450 | PG 400 | PG 400 PETROL |
|---------------------------------|------------------------------|------------------------------|---------------|
| TECHNICAL SPECIFICATIONS | | | |
| Power, kW | 2.2 | 4.0 | 7.6 |
| Voltage, V | 230 | 400 | - |
| Rated current, A | 13 | 16 | - |
| Power supply | 1-phase | 3-phase | Petrol |
| Grinding width, mm | 450 | 400 | 400 |
| Grinding disc, mm | 3×180 | 400 | 400 |
| Grinding pressure total, kg | 69 | 73 | 62-69 |
| Grinding disc speed, rpm | 705 | 1445 | 440-1125 |
| Direction of rotation | - | - | - |
| Dimensions (L×W×H), mm | 1310×482×1144 | 1400×435×1050 | 1397×480×1011 |
| Weight, kg | 109 | 115 | 140 |
| RECOMMENDED EQUIPMENT | | | |
| Recommended dust extractor 1/ 2 | S26 | S36 | T 4000 Petrol |
| Recommended pre-separator | C 3000 | C 3000 | C 3000 |
| ARTICLE INFORMATION | | | |
| | 967 64 86-01 967 64 86-02 | 967 96 64-01 968 96 64-02 | 967 67 63-01 |




PG 690 PG 690 Propane PG 540 (4 KW) PG 540 (2.2 KW) PG 510

| | | | | |
|--|-----------------------|--|--|--|
| 3x200V 50A 11+1.5 kW 3x400V 30A 11+1.5 kW 3x480V 30A 11+1.5 kW | Kohler PC680 | | | |
| 12.5 | 16.2 | 4 | 2.2 | 4 |
| 200-480 | - | 200-480 | 200 | 400/230 |
| 30/30/50 | - | 10/16/30 | 13 | 9/16 |
| 3-phase | Petrol | 3-phase / 1-phase | 1-phase | 3-phase/1-phase |
| 630 | 630 | 500 | 500 | 515 |
| 3x270 | 3x270 | 3x230 | 3 x 230 | 3 x 230 |
| 228 | 188 | 75 | 66 | 79/66 |
| 185-292 | 139-244 | 90-115 | 81-106 | - |
| 441-1470 | 730-1010 | 348-1160 | 348-1160 | 670/540 |
| Dual Drive | Head: CW Disc: CCW | Head: CW Disc: CCW | Head: CW Disc: CCW | - |
| 1300x670x1150 | 1320x670x1155 | 1015x560x735 | 1015x560x735 | 1525x555x950 |
| 502 | 502 | 178 | 169 | 133/120 |
| - | - | - | - | - |
| - | - | - | - | - |
| - / ● | - / ● | - / ● | - / ● | - / ● |
| ● | ● | - | - | - |
| T 7500 C 5500 | C 5500 | T 7500/ T 4000 C 3000 | T 4000/ S 36 C 3000 | T 4000 (3-phase)/ S 26 (1-phase) C 3000 |
| 967 97 75-01, 380-415 V 967 97 75-03, 380-415 V | 967 98 02-01 | 967 97 74-01, 380-415 V 967 97 74-03, 380-415 V | 967 97 74-05, 220-240 V 967 97 74-07, 220-240 V | 967 93 20-01, 3-phase 967 93 20-02, 1-phase |



PG 280

| |
|------------------------------|
| 2.2 |
| 230 |
| 16 |
| 1-phase |
| 280 |
| 280 |
| 41 |
| 1400 |
| - |
| 1200x305x1000 |
| 70 |
| S26 C 3000 |
| 970 49 46-01 970 49 46-02 |

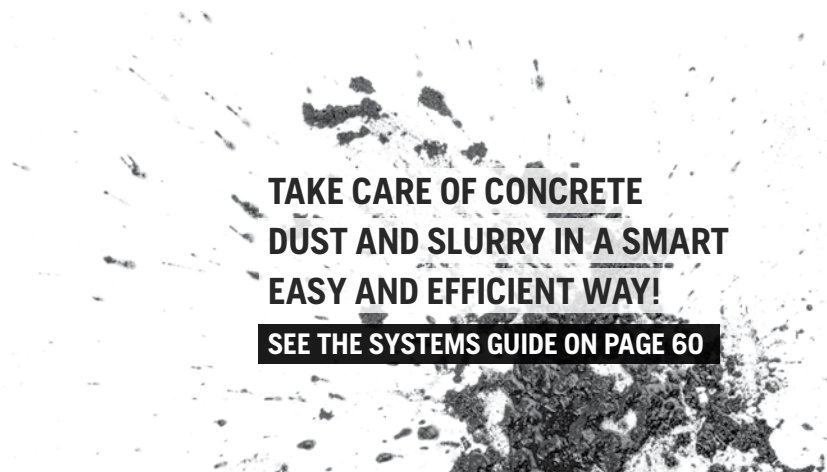

**TAKE CARE OF CONCRETE
DUST AND SLURRY IN A SMART
EASY AND EFFICIENT WAY!**

SEE THE SYSTEMS GUIDE ON PAGE 60



1 Weight kit PG 830, PG 690 and PG 540



2 Light kit PG 830 and PG 690



3 Redi Lock diamond holder disc for PG 830



4 Redi Lock diamond holder disc for PG 690 and PG 540



5 Redi Lock diamond holder disc for PG 450



6 Flexible grinding head spring steel replacement for PG 830



7 Flexible grinding head spring steel replacement for PG 690



8 Resin holder disc



9 Resin holder disc replacement rubber pad



10 Resin holder disc replacement velcro pad



11 Redi Lock resin pad adapter for PG 400 and PG 280



12 Water kit for PG 830 and PG 690



13 HR 820 head, for heavy removal and preparation



14 HR 680 head, for heavy removal and preparation



15 Replacement flexible grinding head for PG 540



16 Silicone ring for heavy removal head



17 Silicone ring



18 Pin



19 Head lock



20 Head lock screw



21 Rubber skirt, non marking



23 Transport wheel for PG 830 RC and PG 690 RC



24 Brush list for PG 510, PG 450 and PG 400



25 Brush list kit, back, front and sides for PG 280



26 Transport trolley



27 Tool box



22 Waist belt, remote control



28 Counterweights

Husqvarna PG 830 RC and PG 830.

ACCESSORIES AND SPARE PARTS

| | |
|--|--------------|
| 1 Weight kit | 597 78 89-01 |
| 2 Light kit | 597 92 52-01 |
| 3 Redi Lock diamond holder disc | 502 53 22-01 |
| 6 Flexible grinding head spring steel replacement | 502 53 42-01 |
| 8 Resin holder disc | 587 15 49-02 |
| 9 Resin holder disc replacement rubber pad | 502 53 19-01 |
| 10 Resin holder disc replacement velcro pad | 587 15 47-01 |
| 12 Water kit | 505 45 32-01 |
| 13 HR 820 head, for heavy removal and preparation | 502 53 38-01 |
| 16 Silicone ring (for heavy removal head) | 502 53 43-01 |
| 17 Silicone ring | 502 53 39-01 |
| 18 Pin | 522 65 98-03 |
| 19 Head lock | 587 45 14-01 |
| 20 Head lock screw | 725 53 70-51 |
| 21 Rubber skirt, non marking | 598 03 43-02 |
| 22 Waist belt, remote control (PG 830 RC) | 501 79 31-01 |
| 23 Transport wheel (PG 830 RC) | 598 41 87-01 |
| 26 Transport trolley | 501 68 51-02 |
| 27 Tool box | 501 68 51-01 |

Husqvarna PG 690 RC and PG 690.

ACCESSORIES AND SPARE PARTS

| | |
|--|--------------|
| 1 Weight kit | 597 78 89-01 |
| 2 Light kit | 597 92 52-01 |
| 4 Redi Lock diamond holder disc | 502 54 58-01 |
| 7 Flexible grinding head spring steel replacement | 502 54 82-01 |
| 8 Resin holder disc | 587 15 95-02 |
| 9 Resin holder disc replacement rubber pad | 502 54 55-01 |
| 10 Resin holder disc replacement velcro pad | 587 15 94-01 |
| 12 Water kit | 505 45 32-01 |
| 14 HR 680 head, for heavy removal and preparation | 502 54 78-01 |
| 16 Silicone ring (for heavy removal head) | 502 53 43-01 |
| 17 Silicone ring | 502 53 39-01 |
| 18 Pin | 522 65 98-03 |
| 19 Head lock | 587 45 14-01 |
| 20 Head lock screw | 725 53 70-51 |
| 21 Rubber skirt, non marking | 598 03 43-01 |
| 22 Waist belt, remote control (PG 690 RC) | 501 79 31-01 |
| 23 Transport wheel (PG 690 RC) | 598 41 87-01 |
| 26 Transport trolley | 501 68 51-02 |
| 27 Tool box | 501 68 51-01 |



Husqvarna PG 540.

| ACCESSORIES AND SPARE PARTS | |
|-----------------------------|---|
| 1 | Weight kit 597 51 27-01 |
| 4 | Redi Lock diamond holder disc 502 54 58-01 |
| 8 | Resin holder disc 587 15 95-02 |
| 9 | Resin holder disc replacement rubber pad 502 54 55-01 |
| 10 | Resin holder disc replacement velcro pad 587 15 94-01 |
| 15 | Replacement flexible grinding head 502 55 82-01 |
| 17 | Silicone ring 502 53 39-01 |
| 18 | Pin 522 65 98-03 |
| 19 | Head lock 587 45 14-01 |
| 20 | Head lock screw 725 53 68-56 |
| 21 | Rubber skirt, non marking 595 65 86-02 |
| 26 | Transport trolley 501 68 51-02 |
| 27 | Tool box 501 68 51-01 |

Husqvarna PG 510.

| ACCESSORIES AND SPARE PARTS | |
|-----------------------------|--|
| 4 | Redi Lock diamond holder disc 502 54 58-01 |
| 8 | Resin holder disc 587 15 95-02 |
| 19 | Head lock 587 45 14-01 |
| 20 | Head lock screw 725 53 68-51 |
| 24 | Brush list 593 44 61-03 |

Husqvarna PG 450.

| ACCESSORIES AND SPARE PARTS | |
|-----------------------------|---|
| 5 | Redi Lock diamond holder disc 584 85 02-01 |
| 8 | Resin holder disc 587 41 02-02 |
| 24 | Brush list 585 13 84-05 |
| 26 | Transport trolley 501 68 51-02 |
| 27 | Tool box 501 68 51-01 |
| | Resin holder disc replacement rubber pad 585 59 19-01 |
| | Resin holder disc replacement velcro pad 587 41 01-01 |

Husqvarna PG 400, PG 400 Petrol and PG 280.

| ACCESSORIES AND SPARE PARTS | |
|-----------------------------|--|
| 11 | Redi Lock resin pad adapter, Ø 75 mm 595 02 34-01 |
| 24 | Brush list (PG 400) 585 13 84-04 |
| 25 | Brush list kit, back, front, sides (PG 280) 582 63 99-01 |
| 26 | Transport trolley 501 68 51-02 |
| 27 | Tool box 501 68 51-01 |
| 28 | Counterweight, 3 kg 589 83 72-01 |
| | 4× Screw for counterweight, 3 kg 725 54 53-01 |
| | 4× Washer for counterweight, 3 kg 734 11 63-01 |
| 28 | Counterweight, 4 kg 589 83 71-01 |
| | 4× Screw for counterweight, 4 kg 725 54 60-01 |
| | 4× Washer for counterweight, 4 kg 734 11 63-01 |
| | 2× Bushing for counterweight, 4 kg 590 20 34-01 |
| | Resin holder disc replacement rubber pad 588 16 90-01 |
| | Resin holder disc replacement velcro pad 587 65 17-01 |



| SCARIFIERS | CG 200 | CG 200 |
|---|------------------------------------|---|
| TECHNICAL SPECIFICATIONS | | |
| Power, kW | 3.6 | 2.2 |
| Voltage, V | NA | 220-240 |
| Rated current, A | NA | 13 |
| Power supply | Petrol | 1-phase |
| Grinding width, mm | 200 | 200 |
| Cutting depth, max, mm | 13 | 13 |
| Recommended cutting depth, mm | 0-4 | 0-4 |
| Vacuum port connection, Ø mm | 50 | 50 |
| Belt | Single, poly-V | Single, poly-V |
| Drum rotation speed (maximum off load), rpm | 1350 | 1350 |
| Dimensions (L×W×H), mm | 780×470×730 | 780×475×730 |
| Weight (excluding tool drum), kg | 54 | 58 |
| RECOMMENDED EQUIPMENT | | |
| | S36 | S36 |
| ARTICLE INFORMATION | | |
| | 967 66 23-01, Petrol, Honda 3.6 kW | 967 66 24-01, 230 V, 50 Hz, 2.2 kW, 1-phase |

Husqvarna CG 200.

| SPARE PARTS | |
|-------------------------------------|--------------|
| Spare shaft | 543 04 02-11 |
| Brush alone, steel | 543 04 60-23 |
| Belt (petrol and electric versions) | 543 04 49-80 |
| Bearing complete, right | 543 04 18-71 |
| Bearing complete, left | 543 04 50-51 |
| Shaft complete | 543 04 18-30 |
| Wheel front | 543 04 59-36 |
| Wrench | 543 04 58-93 |

Husqvarna CG 200 is a highly productive scarifier, designed to remove concrete faster and more aggressively than grinders. Applications include removing coatings (even heavy floor tile mastics and rubbery elastomeric or epoxy materials), light or heavy milling, grooving walkways to make them slip resistant, removing trip hazards in sidewalks, and levelling misaligned concrete joints and uneven surfaces. Equipped with vibration-damping handles for operator comfort, millimetre adjustment for precise depth of operation setting and central exhaust for dust extraction for a cleaner working environment.



**TAKE CARE OF CONCRETE
DUST AND SLURRY IN A SMART
EASY AND EFFICIENT WAY!**

SEE THE SYSTEMS GUIDE ON PAGE 60

SCARIFYING TOOLS

A gold level range of scarifying drums with different steel and carbide wheels that cover applications from coating removal to grooving.

Husqvarna toothed-wheeled cutter.

For dressing concrete and asphalt, levelling surfaces and for anti-slip grooving (corridors, access ramps, stairs, etc), descaling steel decking. By alternating washers and spacers on the four shafts of the drum, user can achieve the desired surface condition: very rough, medium or very fine.

Husqvarna TCT-wheeled cutter (tungsten carbide tipped).

High-performance tool for modifying the surface structure of asphalt and concrete. Very high wear resistance (10 times more life). By alternating washers and spacers on the four shafts of the drum, user can achieve the desired surface condition: very rough, medium or very fine.

Husqvarna star-wheel cutter.

For cleaning concrete and removing epoxy paint, oil, grease, glue and thermoplastic road markings. By alternating washers and spacers on the four shafts of the drum, user can achieve the desired surface condition: very rough, medium or very fine. Available in ready-to-use kits or as spare parts.



A



B



C

Wheels.

| PRODUCT NUMBER | DESCRIPTION | DIAMETER,MM | THICKNESS,MM | MACHINE APPLICATION |
|----------------|---|-------------|--------------|---------------------|
| 543 04 02-14 | Star wheel (processed steel) 60 × 2 mm | 60 | 2 | CG 200 |
| 543 04 02-09 | Toothed wheel (processed steel) 62 × 5 mm | 62 | 5 | CG 200 |
| 543 04 02-16 | Carbide wheel 56 × 6.5 mm | 56 | 6.5 | CG 200 |
| 543 04 02-17 | Spacer (3 mm thickness) | | 3 | CG 200 |

Naked drum with axis.

| PRODUCT NUMBER | DESCRIPTION | DIAMETER,MM | THICKNESS,MM | MACHINE APPLICATION |
|----------------|--------------------------|-------------|--------------|---------------------|
| A 543 04 02-10 | Drum 200 mm large (only) | | | CG 200 |
| 543 04 02-11 | Spare shaft | | | CG 200 |

Complete head assembly kits.

| PRODUCT NUMBER | DESCRIPTION | DIAMETER,MM | THICKNESS,MM | MACHINE APPLICATION |
|----------------|----------------------------------|-------------|--------------|---------------------|
| B 543 04 02-21 | 160 star wheels and 164 spacers | 60 | 2 | CG 200 |
| C 543 04 02-24 | 84 carbide wheels and 84 spacers | 58 | 7 | CG 200 |

DIAMOND TOOLS FOR SURFACE PREPARATION AND FLOOR TREATMENT PRODUCTS

When it comes to surface preparation and tools that polish, grind concrete surfaces or remove previous treatments, we're often talking about work that is both difficult, strenuous and time consuming. By listening to our customers we have been able to build a range of tools to fit every step of the surface preparation process. Whatever level of finish you are looking for, Husqvarna offers an array of tools developed for use with most materials. From the hardest concrete floor to the most abrasive, to meet demands for cutting speed and surface finish.

Metal-bond diamond tools – Redi Lock.

Sturdy, metal-bonded diamond tools for every application. An instant and hassle-free system – switch the entire sets of diamonds instantly without any tooling. Its strong base plate is integrated making the locking system very sturdy and safe. The need for multiple sets of diamond holder discs for different sets of diamond tooling is eliminated. The system is available for a variety of machine manufacturers. With six different types of products, G1400 series offers excellent removal rate and durability, providing maximum profitability and performance with all types of applications. G600 range offers a good simple alternative. Perfect for smaller jobs.



APPLICATION GUIDE

| PRODUCT | ELITE-GRIND G 1400 | | | | | VARI-GRIND G 600 | | | PIRANHA™ | SHARX™ | BHT |
|----------------------------|--------------------|--------|--------|--------|--------|------------------|-------|-------|----------|--------|-----|
| | G 1410 | G 1420 | G 1440 | G 1470 | G 1480 | G 620 | G 640 | G 670 | | | |
| REMOVAL – MATERIAL | | | | | | | | | | | |
| Porous ceramic glues | — | — | — | ●●● | ●● | — | — | ●●● | ●●● | — | ●●● |
| Plastic-like ceramic glues | — | ● | ●●● | — | — | ● | ●●● | — | ●●● | — | ●●● |
| Vinyl glues* | ● | ●● | ●●● | ● | ● | ●● | ●●● | ● | — | — | ●●● |
| Paint & thin epoxy (<2 mm) | ● | ●● | ●●● | ● | ● | ●● | ●●● | ● | — | — | ●●● |
| Thick epoxy (15– 40 mm) | — | ● | ●●● | ● | — | ● | ●●● | ● | ●●● | — | ●●● |
| GRINDING – MATERIAL | | | | | | | | | | | |
| Rain-damaged concrete | — | — | — | ●● | ●●● | — | ● | ●● | ● | — | ●●● |
| Concrete, soft | — | — | — | ●●● | ●● | — | ●● | ●●● | ● | — | ●●● |
| Concrete, medium hard | — | ● | ●●● | ● | — | ● | ●●● | ● | — | — | ●●● |
| Concrete, hard | ●●● | ●●● | ● | — | — | ●●● | ● | — | — | ●●● | ●●● |
| Semi-polished concrete | ●●● | ● | — | — | — | ● | — | — | — | ●●● | ●●● |

RECOMMENDED EQUIPMENT PG 830 RC, PG 830, PG 690 RC, PG 690, PG 540, PG 510, PG 450, PG 400, PG 280

●●● = Optimal ●● = Good ● = Acceptable — = Not recommended

*The advised tooling for this application depends on the type of concrete under the material being removed. Husqvarna recommends starting with a harder bond (G 1470 or G 1450), and moving to a softer bond if productivity is not satisfactory.



A **B** **C** **D** **E**
G 14 44 D

| A | APPLICATION | B | LEVEL OF PERFORMANCE | C | BOND TYPE | RELATED APPLICATION |
|---|--------------------------|--------|----------------------|--------|--|---------------------|
| G | for grinding application | G 1400 | | G 1410 | Very soft tool to grind the hardest floors | |
| | | | | G 1420 | Soft tool for hard surface grinding | |
| | | | | G 1440 | Medium tool for medium concrete | |
| | | | | G 1470 | Hard tool for soft and abrasive concrete | |
| | | | | G 1480 | Very hard tool for very abrasive concrete | |
| | | G 600 | | G 620 | Soft tool for hard surface grinding | |
| | | | | G 640 | Medium tool for medium type concrete | |
| | | | | G 670 | Hard tool for soft and abrasive concrete | |


| D | GRIT SIZE REF. | RELATED MESH SIZE |
|---|----------------|-------------------|
| 2 | | 16 |
| 3 | | 20 |
| 4 | | 30 |
| 5 | | 50 |
| 6 | | 100 |

| E | REF. | SEGMENT |
|----------|------|---------------|
| S | | Single |
| D | | Double |
| T | | Triple |

Husqvarna Elite-Grind G 1400.

A gold level range of metal-bond diamond tools for the Redi Lock system, providing maximum productivity and excellent results. Ideal for HIPERFLOOR jobs. Available in a wide assortment of various bond hardnesses and grit sizes, all easily identified by colour and segment shape.


Grit size

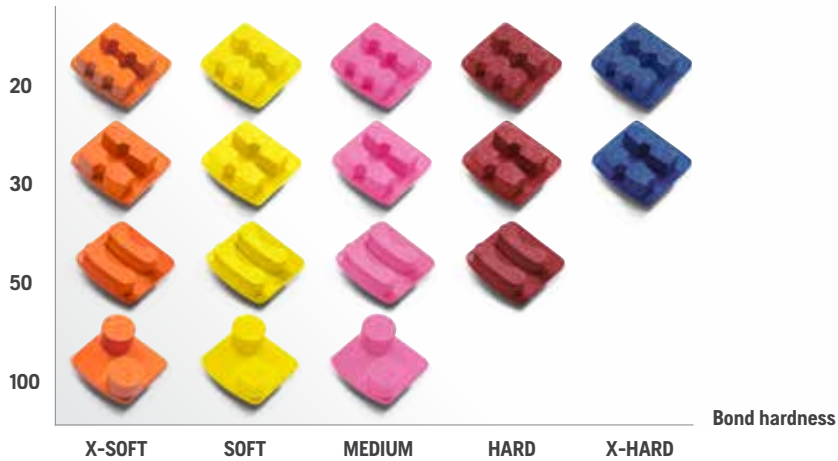

| PRODUCT NUMBER | NAME | COLOUR | SINGLE / DOUBLE | SEGMENT HEIGHT, MM | GRIT SIZE (MESH) | SHAPE | BOND HARDNESS |
|-----------------------|---------|--------|-----------------|--------------------|------------------|-----------|---------------|
| G 1410 (3 pcs) | | | | | | | |
| 501 89 79-01 | G1413S | Orange | Single | 13 | 20 | Two notch | X-Soft |
| 501 89 79-02 | G1413D | Orange | Double | 13 | 20 | Two notch | X-Soft |
| 501 89 89-01 | G1414S | Orange | Single | 13 | 30 | One notch | X-Soft |
| 501 89 89-02 | G1414D | Orange | Double | 13 | 30 | One notch | X-Soft |
| 501 89 92-01 | G1415S | Orange | Single | 13 | 50 | Round | X-Soft |
| 501 89 92-02 | G1415D | Orange | Double | 13 | 50 | Round | X-Soft |
| 501 89 97-01 | G1416S | Orange | Single | 13 | 100 | Round | X-Soft |
| 501 89 97-02 | G1416D | Orange | Double | 13 | 100 | Round | X-Soft |
| G 1420 (3 pcs) | | | | | | | |
| 501 89 99-01 | G 1423S | Yellow | Single | 13 | 20 | Two notch | Soft |
| 501 89 99-02 | G 1423D | Yellow | Double | 13 | 20 | Two notch | Soft |
| 501 90 07-01 | G 1424S | Yellow | Single | 13 | 30 | One notch | Soft |
| 501 90 07-02 | G 1424D | Yellow | Double | 13 | 30 | One notch | Soft |
| 501 90 08-01 | G 1425S | Yellow | Single | 13 | 50 | Round | Soft |
| 501 90 08-02 | G 1425D | Yellow | Double | 13 | 50 | Round | Soft |
| 501 90 15-01 | G 1426S | Yellow | Single | 13 | 100 | Round | Soft |
| 501 90 15-02 | G 1426D | Yellow | Double | 13 | 100 | Round | Soft |
| G 1440 (3 pcs) | | | | | | | |
| 501 90 25-01 | G 1443S | Pink | Single | 13 | 20 | Two notch | Medium |
| 501 90 25-02 | G 1443D | Pink | Double | 13 | 20 | Two notch | Medium |
| 501 90 49-01 | G 1444S | Pink | Single | 13 | 30 | One notch | Medium |
| 501 90 49-02 | G 1444D | Pink | Double | 13 | 30 | One notch | Medium |
| 501 90 65-01 | G 1445S | Pink | Single | 13 | 50 | Round | Medium |
| 501 90 65-02 | G 1445D | Pink | Double | 13 | 50 | Round | Medium |
| 501 90 74-01 | G 1446S | Pink | Single | 13 | 100 | Round | Medium |
| 501 90 74-02 | G 1446D | Pink | Double | 13 | 100 | Round | Medium |
| G 1470 (3 pcs) | | | | | | | |
| 501 90 77-01 | G 1473S | Red | Single | 13 | 20 | Two notch | Hard |
| 501 90 77-02 | G 1473D | Red | Double | 13 | 20 | Two notch | Hard |
| 501 90 79-01 | G 1474S | Red | Single | 13 | 30 | One notch | Hard |
| 501 90 79-02 | G 1474D | Red | Double | 13 | 30 | One notch | Hard |
| 501 90 81-01 | G 1475S | Red | Single | 13 | 50 | Round | Hard |
| 501 90 81-02 | G 1475D | Red | Double | 13 | 50 | Round | Hard |
| G 1480 (3 pcs) | | | | | | | |
| 501 90 82-01 | G 1483D | Blue | Double | 13 | 20 | Two notch | X-Hard |
| 501 90 82-02 | G 1483T | Blue | Triple | 13 | 20 | Two notch | X-Hard |
| 501 90 83-01 | G 1484D | Blue | Double | 13 | 30 | One notch | X-Hard |
| 501 90 83-02 | G 1484T | Blue | Triple | 13 | 30 | One notch | X-Hard |

Husqvarna Vari-Grind G 600.

A silver level range of metal-bond diamond tools for the Redi Lock system, providing great work result in allround surface prep applications. Ideal for rental and domestic use. Available in various bond hardness and grit sizes, easily identified by colour and segment shape.

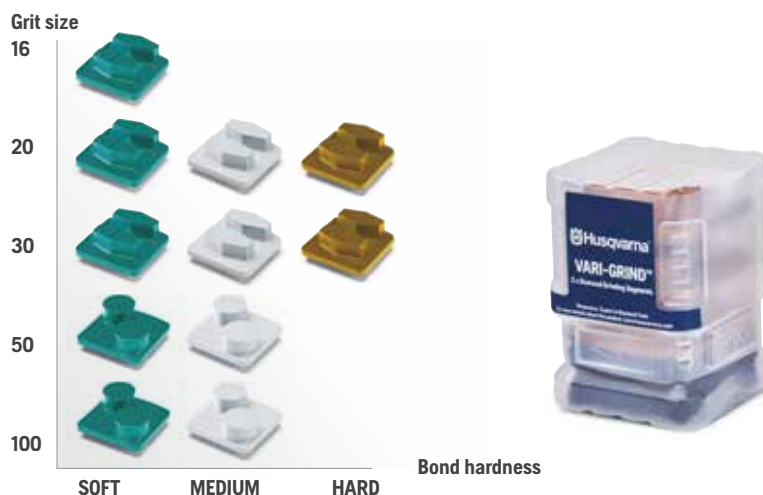

| PRODUCT NUMBER | NAME | COLOUR | SINGLE/DOUBLE | SEGMENT HEIGHT, MM | GRIT SIZE (MESH) | SHAPE | BOND HARDNESS |
|----------------------|--------|--------|---------------|--------------------|------------------|-----------|---------------|
| G 620 (3 pcs) | | | | | | | |
| 503 84 79-01 | G 622D | Green | Double | 10 | 16 | Hexagonal | Soft |
| 503 84 79-02 | G 623S | Green | Single | 10 | 20 | Hexagonal | Soft |
| 503 84 79-03 | G 623D | Green | Double | 10 | 20 | Hexagonal | Soft |
| 503 84 79-04 | G 624S | Green | Single | 10 | 30 | Hexagonal | Soft |
| 503 84 79-05 | G 624D | Green | Double | 10 | 30 | Hexagonal | Soft |
| 503 84 79-06 | G 625S | Green | Single | 10 | 50 | Round | Soft |
| 503 84 79-07 | G 625D | Green | Double | 10 | 50 | Round | Soft |
| 503 84 79-08 | G 627S | Green | Single | 10 | 100 | Round | Soft |
| 503 84 79-09 | G 627D | Green | Double | 10 | 100 | Round | Soft |
| G 640 (3 pcs) | | | | | | | |
| 503 88 34-01 | G 643S | Grey | Single | 10 | 20 | Hexagonal | Medium |
| 503 88 34-02 | G 643D | Grey | Double | 10 | 20 | Hexagonal | Medium |
| 503 88 34-03 | G 644S | Grey | Single | 10 | 30 | Hexagonal | Medium |
| 503 88 34-04 | G 644D | Grey | Double | 10 | 30 | Hexagonal | Medium |
| 503 88 34-05 | G 645S | Grey | Single | 10 | 50 | Round | Medium |
| 503 88 34-06 | G 645D | Grey | Double | 10 | 50 | Round | Medium |
| 503 88 34-07 | G 647S | Grey | Single | 10 | 100 | Round | Medium |
| 503 88 34-08 | G 647D | Grey | Double | 10 | 100 | Round | Medium |
| G 670 (3 pcs) | | | | | | | |
| 503 88 55-01 | G 673S | Gold | Single | 10 | 20 | Hexagonal | Hard |
| 503 88 55-02 | G 673D | Gold | Double | 10 | 20 | Hexagonal | Hard |
| 503 88 55-03 | G 674S | Gold | Single | 10 | 30 | Hexagonal | Hard |
| 503 88 55-04 | G 674D | Gold | Double | 10 | 30 | Hexagonal | Hard |

Husqvarna Piranha™.-

For removal of hard-to-remove coatings, adhesives and screeds. Maximum wear and productivity with Husqvarna's Piranha™ diamond scraper inserts. For use in conjunction with the Redi Lock system.



| PRODUCT NUMBER | NAME | DESCRIPTION | ROTATION | RECOMMENDED WITH |
|----------------|--------|-----------------------|--------------------------|--|
| 543 32 73-01 | G11X1S | Single Piranha™ plate | Anti-clockwise direction | PG 830, PG 830 RC, PG 690, PG 690 RC, PG 540, PG 510, PG 450, PG 400, PG 280 |
| 543 32 73-02 | G11X1D | Double Piranha™ plate | Anti-clockwise direction | PG 830, PG 830 RC, PG 690, PG 690 RC, PG 540, PG 510, PG 450, PG 400, PG 280 |
| 543 32 73-03 | G11Y1D | Double Piranha™ plate | Clockwise direction | |

Husqvarna Sharx™.

For fast and easy removal of dense surfaces on hard-troweled concrete floors. The Sharx™ metal bond significantly increases the productivity and ensures that the pads stay opened and sharp even on the hardest top layers.



| PRODUCT NUMBER | NAME | COLOUR | SINGLE/DOUBLE | BOND HARDNESS |
|----------------|------------------------|--------|---------------|---------------|
| 574 43 04-02 | Sharx™ - Single 3-pack | Silver | Single | Sharx™ |
| 574 43 04-03 | Sharx™ - Double 3-pack | Silver | Double | Sharx™ |

Husqvarna Bush Hammering Tools.

For creating a bush hammered profile - perfect for high traction exterior surfaces. Suitable for thick epoxy, rain-damaged concrete, semi-polished concrete, as well as hard, medium and soft concrete.




| PRODUCT NUMBER | NAME | DIAMETER, MM | NO. OF ROLLS | RECOMMENDED WITH |
|----------------|---------|--------------|--------------|-------------------|
| 593 34 42-10 | BHT 230 | 230 | 3 | PG 690, PG 690 RC |
| 593 34 42-11 | BHT 270 | 270 | 3 | PG 830, PG 830 RC |
| 593 34 42-12 | BHT 270 | 270 | 6 | PG 830, PG 830 RC |

POLISHING TOOLS FOR DRY AND WET APPLICATIONS

Polishing pad delivering exceptional gloss and clarity when used for dry and wet polishing of concrete, terrazzo and some natural stones. Highly recommended for use in conjunction with Hiperhard™ floor densifier/hardener in the HIPERFLOOR concrete polishing system.

Polishing range overview.

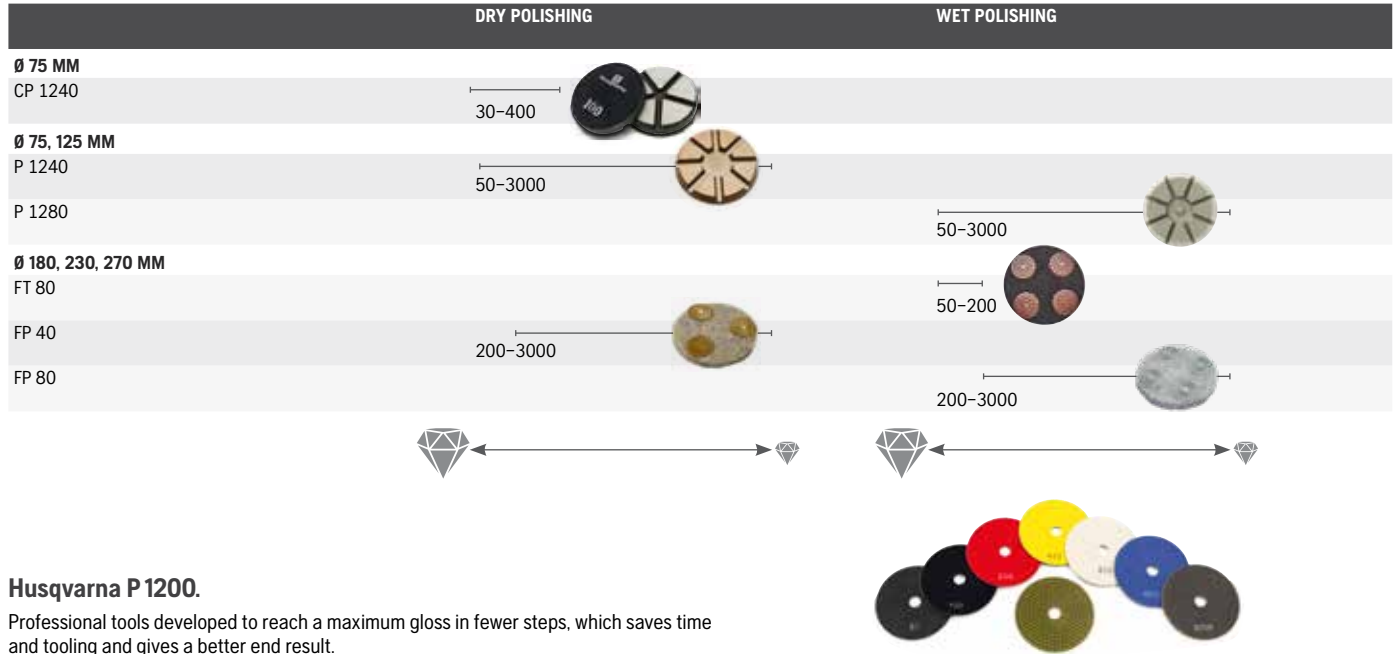

Husqvarna P 1200.

Professional tools developed to reach a maximum gloss in fewer steps, which saves time and tooling and gives a better end result.

| PRODUCT NUMBER | NAME | COLOUR | DIAMETER, MM | GRIT SIZE (MESH) | DIAMOND HEIGHT, MM |
|---|-------|------------|--------------|------------------|--------------------|
| FOR PG MACHINES, DRY APPLICATION | | | | | |
| 574 42 82-01 | P1242 | Dark green | 76 | 50 | 6.5 |
| 574 42 83-01 | P1243 | Black | 76 | 100 | 6.5 |
| 574 42 84-01 | P1244 | Red | 76 | 200 | 6.5 |
| 574 42 85-01 | P1245 | Yellow | 76 | 400 | 6.5 |
| 574 42 86-01 | P1246 | White | 76 | 800 | 6.5 |
| 574 42 87-01 | P1247 | Blue | 76 | 1500 | 6.5 |
| 574 42 88-01 | P1248 | Grey | 76 | 3000 | 6.5 |
| FOR HANDHELD MACHINES, DRY APPLICATION | | | | | |
| 574 42 89-01 | P1242 | Dark green | 125 | 50 | 2.8 |
| 574 42 90-01 | P1243 | Black | 125 | 100 | 2.8 |
| 574 42 91-01 | P1244 | Red | 125 | 200 | 2.8 |
| 574 42 92-01 | P1245 | Yellow | 125 | 400 | 2.8 |
| 574 42 93-01 | P1246 | White | 125 | 800 | 2.8 |
| 574 42 96-01 | P1247 | Blue | 125 | 1500 | 2.8 |
| 575 42 97-01 | P1248 | Grey | 125 | 3000 | 2.8 |
| FOR PG MACHINES, WET APPLICATION | | | | | |
| 582 32 59-05 | P1282 | Dark green | 76 | 50 | 6.5 |
| 582 32 59-04 | P1283 | Black | 76 | 100 | 6.5 |
| 582 32 59-01 | P1284 | Red | 76 | 200 | 6.5 |
| 582 32 59-03 | P1285 | Yellow | 76 | 400 | 6.5 |
| 582 32 59-06 | P1286 | White | 76 | 800 | 6.5 |
| 582 32 79-07 | P1287 | Blue | 76 | 1500 | 6.5 |
| 582 32 59-08 | P1288 | Grey | 76 | 3000 | 6.5 |
| FOR HANDHELD MACHINES, WET APPLICATION | | | | | |
| 589 77 19-01 | P1282 | Dark green | 125 | 50 | 2.8 |
| 589 77 19-02 | P1283 | Black | 125 | 100 | 2.8 |
| 589 77 19-03 | P1284 | Red | 125 | 200 | 2.8 |
| 589 77 19-04 | P1285 | Yellow | 125 | 400 | 2.8 |
| 589 77 19-05 | P1286 | White | 125 | 800 | 2.8 |
| 589 77 19-06 | P1287 | Blue | 125 | 1500 | 2.8 |
| 589 77 19-07 | P1288 | Grey | 125 | 3000 | 2.8 |

Adapters for resin tools.

| PRODUCT NUMBER | NAME |
|----------------|---|
| 580 28 96-01 | Redi Lock resin pad adapter, Ø 75 mm |
| 505 49 05-01 | Pad adapter for handheld machines, Ø 125 mm |



Husqvarna HiperFlex.

Resin-bonded polishing tools on a flexible backing pad. Used dry for overlays and high quality polished concrete surfaces. For all our planetary grinders.

| PRODUCT NUMBER | NAME | DIMENSION, MM | GRIT SIZE (MESH) | MACHINE APPLICATION |
|----------------------------|------|---------------|------------------|---------------------|
| HIPERFLEX FP 40 DRY | | | | |
| 587 54 67-01 | FP44 | 180 | 200 | PG 450 |
| 587 54 67-02 | FP45 | 180 | 400 | PG 450 |
| 587 54 67-03 | FP46 | 180 | 800 | PG 450 |
| 587 54 67-04 | FP47 | 180 | 1500 | PG 450 |
| 587 54 67-05 | FP48 | 180 | 3000 | PG 450 |
| 542 77 93-16 | FP44 | 230 | 200 | PG 690, PG 540 |
| 542 77 93-17 | FP45 | 230 | 400 | PG 690, PG 540 |
| 542 77 93-18 | FP46 | 230 | 800 | PG 690, PG 540 |
| 542 77 93-19 | FP47 | 230 | 1500 | PG 690, PG 540 |
| 542 77 93-20 | FP48 | 230 | 3000 | PG 690, PG 540 |
| 542 87 00-56 | FP44 | 270 | 200 | PG 830 |
| 542 86 84-07 | FP45 | 270 | 400 | PG 830 |
| 542 86 84-08 | FP46 | 270 | 800 | PG 830 |
| 542 86 84-09 | FP47 | 270 | 1500 | PG 830 |
| 542 86 84-10 | FP48 | 270 | 3000 | PG 830 |
| HIPERFLEX FP 80 WET | | | | |
| 589 63 37-01 | FP84 | 180 | 200 | PG 450 |
| 589 63 37-02 | FP85 | 180 | 400 | PG 450 |
| 589 63 37-03 | FP86 | 180 | 800 | PG 450 |
| 589 63 37-04 | FP87 | 180 | 1500 | PG 450 |
| 589 63 37-05 | FP88 | 180 | 3000 | PG 450 |
| 589 63 39-01 | FP84 | 230 | 200 | PG 690, PG 540 |
| 589 63 39-02 | FP85 | 230 | 400 | PG 690, PG 540 |
| 589 63 39-03 | FP86 | 230 | 800 | PG 690, PG 540 |
| 589 63 39-04 | FP87 | 230 | 1500 | PG 690, PG 540 |
| 589 63 39-05 | FP88 | 230 | 3000 | PG 690, PG 540 |
| 589 63 41-01 | FP84 | 270 | 200 | PG 830 |
| 589 63 41-02 | FP85 | 270 | 400 | PG 830 |
| 589 63 41-03 | FP86 | 270 | 800 | PG 830 |
| 589 63 41-04 | FP87 | 270 | 1500 | PG 830 |
| 589 63 41-05 | FP88 | 270 | 3000 | PG 830 |
| HIPERFLEX FT 80 WET | | | | |
| 589 63 36-01 | FT82 | 180 | 50 | PG 450 |
| 589 63 36-02 | FT83 | 180 | 100 | PG 450 |
| 589 63 36-03 | FT84 | 180 | 200 | PG 450 |
| 589 63 38-01 | FT82 | 230 | 50 | PG 690, PG 540 |
| 589 63 38-02 | FT83 | 230 | 100 | PG 690, PG 540 |
| 589 63 38-03 | FT84 | 230 | 200 | PG 690, PG 540 |
| 589 63 40-01 | FT82 | 270 | 50 | PG 830 |
| 589 63 40-02 | FT83 | 270 | 100 | PG 830 |
| 589 63 40-03 | FT84 | 270 | 200 | PG 830 |

Husqvarna Foam Adapter Pad for FT 80.

Foam adapter can be used in combination with the flex transition to bring additional flexibility. To be placed between the plate and the pads.

| PRODUCT NUMBER | NAME | DIMENSION, MM | MACHINE |
|----------------|------------------------------|---------------|----------------|
| 589 67 41-02 | Male/female foam adapter 7" | 180 | PG 510, PG 450 |
| 589 67 42-01 | Male/female foam adapter 9" | 230 | PG 540, 690 |
| 589 67 39-01 | Male/female foam adapter 10" | 270 | PG 830 |

CERAMIC DRY GRINDING AND POLISHING TOOLS

Ceramic tools for dry grinding and polishing of concrete. Aggressive tool for grinding and honing of concrete, which will leave an excellent scratch pattern. Long life offers excellent value for money.



Husqvarna CP 1200.

Premium tools for industrial finished concrete floor.

| PRODUCT NUMBER | NAME | COLOUR | DIAMETER, MM | GRIT SIZE (MESH) | DIAMOND HEIGHT, MM |
|----------------|---------|------------|--------------|------------------|--------------------|
| 577 31 70-04 | CP 1241 | Purple | 75 | 30 | 6.5 |
| 577 31 70-01 | CP 1242 | Dark green | 75 | 50 | 6.5 |
| 577 31 70-02 | CP 1243 | Black | 75 | 100 | 6.5 |
| 577 31 70-05 | CP 1244 | Red | 75 | 200 | 6.5 |
| 577 31 70-03 | CP 1245 | Yellow | 75 | 400 | 6.5 |

MAINTENANCE PADS

Diamond impregnated pads that are ideal for cleaning concrete polished floors. Use with Husqvarna PG 450, PG 540, PG 690 and PG 830 grinders.



Husqvarna HiperClean Dry Pads.

Ideal for cleaning concrete polished floors. Use with PG 450, PG 530, PG 680 and PG 820 Husqvarna grinders, hand tooling and burnishing equipment.

| PRODUCT NUMBER | DIMENSION, MM | GRIT SIZE (MESH) | MACHINE APPLICATION |
|----------------|---------------|------------------|--------------------------------|
| 542 87 00-76 | 127 | 400 | Hand Grinder |
| 542 87 00-77 | 127 | 800 | Hand Grinder |
| 542 87 00-78 | 127 | 1500 | Hand Grinder |
| 542 87 00-79 | 127 | 3000 | Hand Grinder |
| 501 76 40-07 | 180 | 400 | PG 450 |
| 501 76 40-01 | 180 | 800 | PG 450 |
| 501 76 40-02 | 180 | 1500 | PG 450 |
| 501 76 40-03 | 180 | 3000 | PG 450 |
| 501 76 40-08 | 230 | 400 | PG 690, PG 540 |
| 501 76 40-04 | 230 | 800 | PG 690, PG 540 |
| 501 76 40-05 | 230 | 1500 | PG 690, PG 540 |
| 501 76 40-06 | 230 | 3000 | PG 690, PG 540 |
| 501 76 40-09 | 270 | 400 | PG 830 |
| 501 76 40-10 | 270 | 800 | PG 830 |
| 501 76 40-11 | 270 | 1500 | PG 830 |
| 501 76 40-12 | 270 | 3000 | PG 830 |
| 589 81 05-05 | 400 | 400 | Floor scrubbers and burnishers |
| 589 81 05-06 | 400 | 800 | Floor scrubbers and burnishers |
| 589 81 05-07 | 400 | 1500 | Floor scrubbers and burnishers |
| 589 81 05-08 | 400 | 3000 | Floor scrubbers and burnishers |
| 542 87 00-80 | 430 | 400 | Floor scrubbers and burnishers |
| 542 87 00-81 | 430 | 800 | Floor scrubbers and burnishers |
| 542 87 00-82 | 430 | 1500 | Floor scrubbers and burnishers |
| 542 87 00-83 | 430 | 3000 | Floor scrubbers and burnishers |
| 542 87 00-84 | 530 | 400 | Floor scrubbers and burnishers |
| 542 87 00-85 | 530 | 800 | Floor scrubbers and burnishers |
| 542 87 00-86 | 530 | 1500 | Floor scrubbers and burnishers |
| 542 87 00-87 | 530 | 3000 | Floor scrubbers and burnishers |
| 542 87 00-88 | 600 | 400 | Floor scrubbers and burnishers |
| 542 87 00-89 | 600 | 800 | Floor scrubbers and burnishers |
| 542 87 00-90 | 600 | 1500 | Floor scrubbers and burnishers |
| 542 87 00-91 | 600 | 3000 | Floor scrubbers and burnishers |
| 542 87 00-92 | 685 | 400 | Floor scrubbers and burnishers |
| 542 87 00-93 | 685 | 800 | Floor scrubbers and burnishers |
| 542 87 00-94 | 685 | 1500 | Floor scrubbers and burnishers |
| 542 87 00-95 | 685 | 3000 | Floor scrubbers and burnishers |

CUP WHEELS FOR SURFACE PREPARATION

Gold level grinding tools for handheld applications, dedicated to floor specialists and construction professionals. The product range offers the highest performance in all floor preparation applications. The cups are provided with 22.2 bore hole and an M 14 adapter in order to provide more options for the user. The anti-vibration connector decreases the vibration for the user and makes the job less tiring. The effect can be cancelled by using the M 14 adapter.



Husqvarna G 10X1.

For removal of epoxy, vinyls and glues.

| PRODUCT NUMBER | NAME | CONNECTOR | DIAMETER, MM |
|----------------|--------|-----------|--------------|
| 543 09 34-65 | G 10X1 | 22.2/M14 | 125 |

Husqvarna G 1042.

For epoxy and glue removal.

| PRODUCT NUMBER | NAME | CONNECTOR | DIAMETER, MM |
|----------------|--------|-----------|--------------|
| 543 09 34-66 | G 1042 | 22.2/M14 | 125 |

Husqvarna G 1073/G1043/G 1013.

For concrete repairs, floor flattening and aggregate exposure.

| PRODUCT NUMBER | NAME | APPLICATION | CONNECTOR | DIAMETER, MM | GRIT SIZE (MESH) |
|----------------|--------|----------------------------|-----------|--------------|------------------|
| 543 09 34-68 | G 1013 | Hard to very hard concrete | 22.2/M14 | 125 | 20/30 |
| 543 09 34-69 | G 1043 | Normal concrete | 22.2/M14 | 125 | 20/30 |
| 543 09 34-70 | G 1073 | Abrasive material | 22.2/M14 | 125 | 20/30 |

Husqvarna G 1045/G 1015.

For epoxy and sealer laying preparation.

| PRODUCT NUMBER | NAME | APPLICATION | CONNECTOR | DIAMETER, MM | GRIT SIZE (MESH) |
|----------------|--------|---------------------------------------|-----------|--------------|------------------|
| 543 09 34-72 | G 1015 | Normal to hard and very hard concrete | 22.2/M14 | 125 | 40/50 |
| 543 09 34-74 | G 1045 | Normal to soft and abrasive concrete | 22.2/M14 | 125 | 40/50 |


Husqvarna G 1017.

For scratch removal and polishing preparation.

| PRODUCT NUMBER | NAME | CONNECTOR | DIAMETER, MM | GRIT SIZE (MESH) |
|----------------|--------|-----------|--------------|------------------|
| 543 09 34-75 | G 1017 | 22.2/M14 | 125 | 100/120 |

HUSQVARNA DIAMOND TOOL SELECTOR APP

How do you handle the complex decision on which diamond tools to use and the quantity needed for your next job? Download the handy Husqvarna Diamond Tools Selector app! You will save valuable time and get the right tools for the job, right from the start, every time. Available for free from App Store.

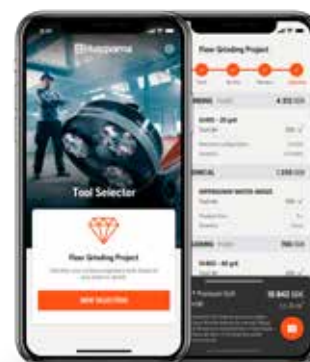

TRANSFORM CONCRETE FLOORS

Concrete is one of the most durable surfaces known to man. However, by mechanically refining the surface through grinding, polishing and chemical treatment, we can bring the surface to a whole new level of beauty, functionality and strength. With different specified processes, a flooring solution can be tailored to fit any requirement – aesthetic, flatness, gloss and price. Only by using Husqvarna equipment, diamond tools and concrete chemicals can a polished concrete floor truly be called HIPERFLOOR. Husqvarna offers a range of floor treatment products for use in the HIPERFLOOR process to help you achieve a first-class mechanical and aesthetic finish.



INDUSTRIAL FINISH



COMMERCIAL FINISH



PREMIUM FINISH



Husqvarna Floor Grouting System.

Husqvarna grouting products are specifically formulated for pore filling of pin-holes and micro cracks in concrete surfaces.

GM3000 is our primary recommendation of grouting. A ready-to use liquid that is easily spread out onto the floor and grinded down into the surface. Suitable for medium- to large-scale projects.

GM+ is well suited for small-scale projects where time is of essence, and/or specific areas with large pin-holes (up to 5mm) to fix.

Thanks to the dry processing method we avoid slurry and the need of splash protection and also sequential cleaning of the grinders and tools. afterwards..

| PRODUCT NUMBER | NAME |
|----------------|----------------|
| 581 92 18-06 | GM 3000™, 20 l |
| 529 75 09-08 | GM+, 9 l |

Husqvarna Floor Hardening System.

All Husqvarna CURE densifiers provides a solution capable of increasing the abrasion- and scratch resistance of concrete, while adding basic stain resistance, limiting efflorescence and dustproofing your surface.

At the same time increasing the longevity of nearly any concrete surface, from freshly poured to decades-old concrete, and to do all of this in a labor-efficient, cost-effective manner. It penetrates deep into the surface and react with calcium hydroxide present in the concrete to form calcium silicate hydrate (CSH), which progressively hydrate to a glass-like crystalline structure.

The silica blend improves the density and hardness of concrete and reduces the penetration of liquids and dirt.

Husqvarna CURE densifiers comes in three different versions:

CURE (K) - a Potassium silicate. Ideal for densification early in the grinding process or for use on porous or trowelled floors. Well suited for large-scale projects.

CURE (L) - a Lithium silicate. Ideal for dense surfaces or outdoor projects and as an additional lipcoat after the initial CURE application, to optimize the densification effect throughout the grinding process.

CURE + offers premium densification with integrated basic stain protection. It is a hybrid potassium-, lithium-silicate including also silicate to add a hydrophobic effect. Combining the strengths of both lithium and potassium silicates makes it a great multi-purpose densifier for most types of situations.



| PRODUCT NUMBER | NAME |
|----------------|----------------|
| 529 75 10-09 | Cure (K), 20 l |
| 529 75 13-07 | Cure (L), 20 l |
| 529 75 53-01 | Cure +, 20 l |
| 529 75 53-02 | Cure +, 200 l |

Husqvarna Floor Protection System.

Husqvarna GUARD products are all providing stain protection to concrete floors and natural stone, restricting the absorption of water, oil, fats and dirt. Stains are kept at the surface level, which simplifies maintenance and extends the lifespan of the floor.

Our PREMIUM-grade surface impregnators are all penetrating guards, whilst our TOPICAL GUARD is a film-forming topical sealer.

PREMIUM GUARD SB is a solvent based penetrating guard that is very easy to apply and provides premium protection. It also enhances the color of the floor. The PREMIUM GUARD is the choiche when creating a HIPERFLOOR since diffusion-openness is fully preserved.

TOPICAL GUARD is a water based silane modified acrylic sealer that forms a microscopic semi-topical barrier. It is designed to be used when the surface is needing extra protection from topical harsh spills and chemical attacks.



| PRODUCT NUMBER | NAME |
|----------------|-----------------------|
| 501 19 79-07 | Premium Guard SB, 5l |
| 501 19 79-08 | Premium Guard SB, 10l |
| 580 50 29-06 | Topical Guard, 20l |

Husqvarna Floor CLEANING System.

CLEAN & PROTECT is a natural soap, specially developed as a cleaning and treatment solution for concrete and natural stone floors. The soap is entirely based on natural products, and the mixed solution has a pH of 8. The solution leaves a durable upper surface that simplifies future maintenance.

Can be used either with a cleaning mop or an auto scrubber.



| PRODUCT NUMBER | NAME |
|----------------|---------------------|
| 529 75 52-03 | Clean & Protect, 5l |

Husqvarna burnishing pads.

Recommended for use in conjunction with Husqvarna PREMIUM GUARD



| PRODUCT NUMBER | NAME |
|----------------|---|
| 543 08 73-44 | Burnishing pad for PG 530 and PG 680, Ø 240 mm |
| 543 08 73-49 | Burnishing pad for PG 820, Ø 270 mm |
| 574 51 36-01 | Velcro adapter plates for burnishing pads, 240 mm |
| 574 51 36-02 | Velcro adapter plates for burnishing pads, 270 mm |



 **Husqvarna**[®]

www.husqvarnacp.com